


15 DEGREE OFFSET AND RETURN

A	B						
<i>in.</i>	<i>in.</i>	SL306	SL312	SL318	SL324	SL336	SL348
1 5/8	13 3/8	-	-	-	-	-	-
2 7/8	17 3/4	1	-	-	-	-	-
4 1/8	22 3/8	2	-	-	-	-	-
4 1/2	23 5/8	-	1	-	-	-	-
5 3/4	28 1/4	1	1	-	-	-	-
6	29 3/8	-	-	1	-	-	-
7 1/4	34	-	2	-	-	-	-
7 3/4	36 1/8	-	-	-	1	-	-
8 3/4	39 3/4	1	-	-	1	-	-
10 3/8	45 5/8	-	-	2	-	-	-
10 5/8	46 3/4	-	-	-	-	1	-
11 7/8	51 3/8	1	-	-	-	1	-
13 1/2	57 1/4	-	-	-	2	-	-
13 3/4	58 3/8	-	-	-	-	-	1
15	63	1	-	-	-	-	1
16 1/2	68 3/4	-	1	-	-	-	1
18	74 5/8	-	-	1	-	-	1
19 5/8	80 3/8	-	-	-	1	-	1
20 5/8	84 1/8	1	-	-	1	-	1
22 3/4	91 7/8	-	-	-	-	1	1
24	96 1/2	1	-	-	-	1	1
25 7/8	103 1/2	-	-	-	-	-	2

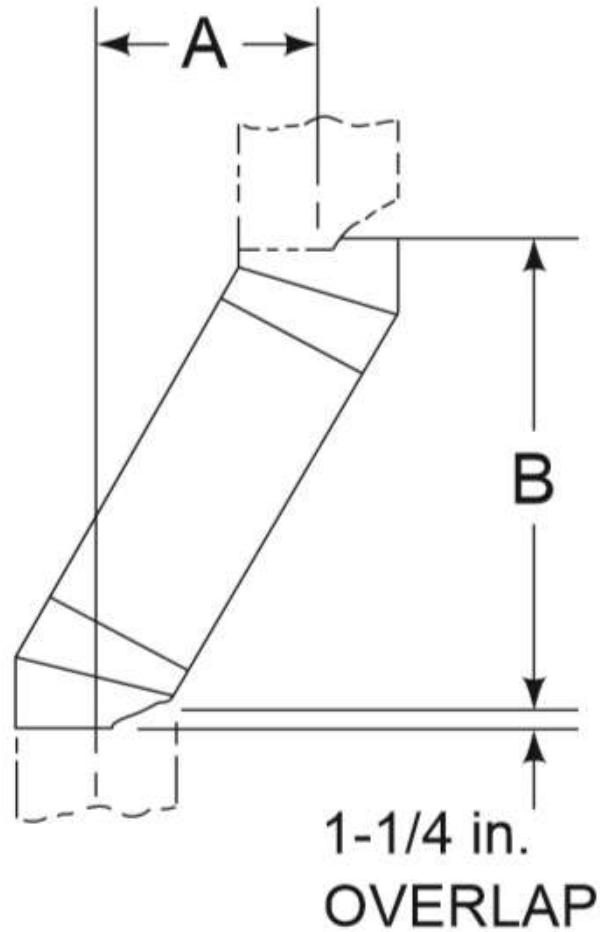

Proper assembly of air cooled chimney parts results in an overlap of chimney joints of 1-1/4 in. Effective length is built into this table.