

T25 Timberwolf Woodburning Stove


FEATURES

COLOR	Black
BURN TIME (ON LOW SETTING)	16.26 hours
COMBUSTION TECHNOLOGY	Non-catalytic
RECOMMENDED HEATING AREA (1)	Up to 2,100 ft ²
HEATING CAPACITY - BTU/h, SEASONED CORD WOOD	70,000 BTU/h
EMISSIONS (EPA)	1.30 g/h
OPTIMUM EFFICIENCY	71.56%
FIREBOX DIMENSIONS (W X D)	23 1/2" x 18"
FIREBOX VOLUME	2.51 ft ³
GLASS VIEWING AREA (W X H)	18 1/2" x 10 7/8"
DOOR TYPE	Cast Iron Door
MAXIMUM LOG LENGTH	17" or 23"
LOG POSITIONING	Front-back or Left-right
FLUE COLLAR DIAMETER	6"
GLASS TYPE	Ceramic glass
ASH DRAWER WITH SAFETY LID	Optional
MOBILE HOME APPROVED	Yes
APPROVED FOR AN ALCOVE INSTALLATION	Yes
WARRANTY	Presidents Limited lifetime

EXTERIOR DIMENSIONS AND WEIGHT

WIDTH	28 3/4"
DEPTH	27"
HEIGHT	37 1/2"
WEIGHT	426.4 lb.

	CONFIGURATION	SIDE WALL (A)	SIDE WALL TO FLUE (B)	BACK WALL (C)	BACK WALL TO FLUE (D)	CEILING (E)
With T.H.S.	Straight with single wall pipe	16 1/4" (41.2cm)	27 1/2" (69.8cm)	9 1/2" (24.1cm)	11" (27.9cm)	84" (213.3cm)
	Straight with double wall pipe			6 1/2" (16.5cm)	7 1/2" (19cm)	
	Through the wall with single wall pipe			9 1/2" (24.1cm)	11" (27.9cm)	
	Through the wall with double wall pipe			6 1/2" (16.5cm)	7 1/2" (19cm)	
Without T.H.S.	Straight with single wall pipe *	16 1/4" (41.2cm)	27 1/2" (69.8cm)	14 1/2" (36.8cm)	16" (40.6cm)	96" (243.8cm)
	Straight with double wall pipe *			12 1/2" (31.7cm)	13 1/2" (34.2cm)	
	Through the wall with single wall pipe *			14 1/2" (36.8cm)	16" (40.6cm)	
	Through the wall with double wall pipe *			12 1/2" (31.7cm)	13 1/2" (34.2cm)	
	CONFIGURATION	SIDE WALL	SIDE WALL TO FLUE	BACK WALL	BACK WALL TO FLUE	CEILING
With T.H.S.	Corner (F)	4" (10.1cm)	14 1/4" (36.1cm)	4" (10.1cm)	14 1/4" (36.1cm)	84" (213.3cm)
Without T.H.S.	Corner (F) *	6" (15.2cm)	16 1/4" (41.3cm)	6" (15.2cm)	16 1/4" (41.2cm)	96" (243.8cm)

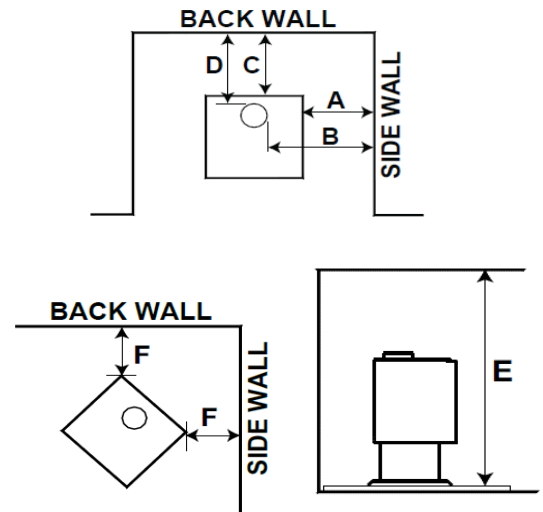

Unit Dimensions

