Specifications SF-FM50-WH



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


Format 50" Floating Mantel Wall-Mount


SIDE VIEW

Electric Fireplace

Model	BTU Output	Width	Height	Depth	Sides	Viewing Area (F x G)
SF-FM50-WH	5000	50" [1270]	23-5/16" [592]	9-7/8" [250]	6-7/8" [175]	36-1/16" x 12-5/8" [916 x 321]

FRONT VIEW

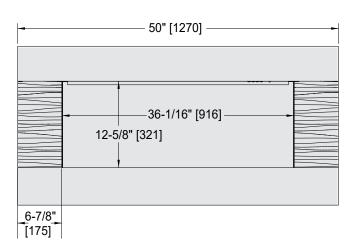





ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz	Plug-in or hardwire	5,000

LOCATION AND CLEARANCES REQUIREMENTS

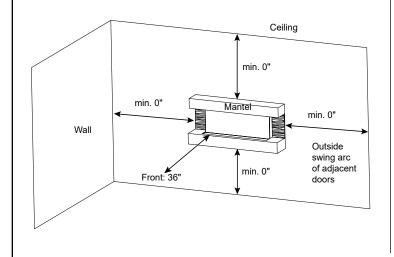

LOCATION OF OUTLET RECEPTACLE



An electrical receptacle may be discretely located under the bottom mantel. When planning the location of the appliance, special care is required to ensure the wall mount bracket is located a sufficient distance above the electrical receptacle.



Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.



CSA C22.2 No 46-2013